


TFC2 Fog cut-out relay

When a trailer is plugged in, the TFC2 controls the trailer fog light and simultaneously switches off the car's fog lights.

The car sees the trailer fog light, so any bulb-failure warning in the fog light circuit is not activated.

If you install this relay with a bypass relay, **DO NOT** make any connection from the bypass relay to the trailer fog Light terminal (pin 2) of the trailer socket.

If you install this relay, do not make any foglight connections at all on the bypass relay (if one is fitted).

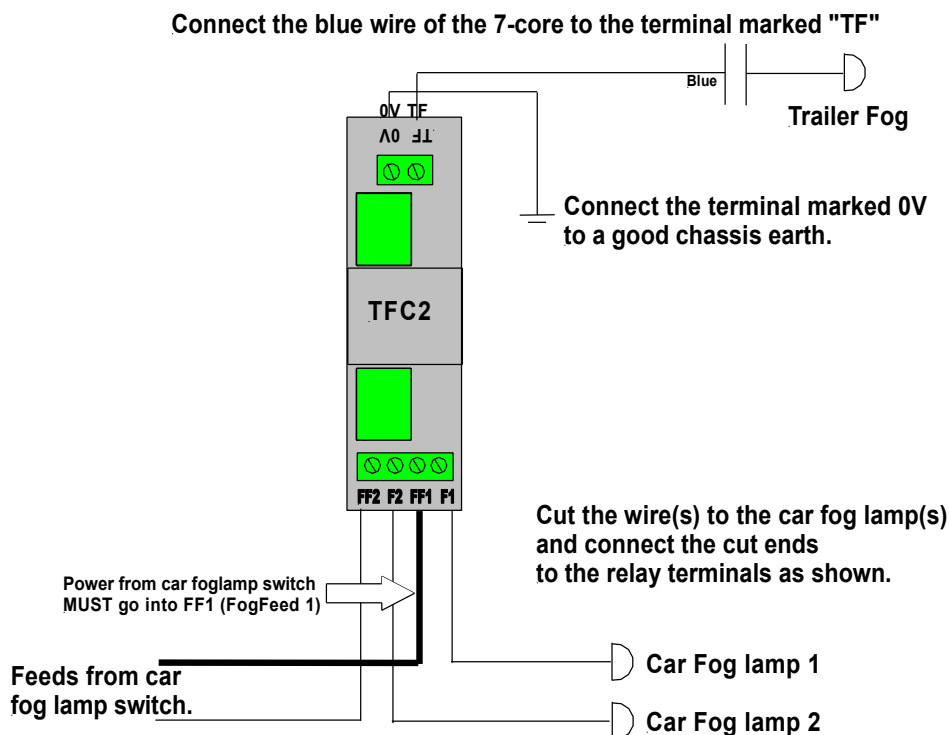

****Important Note: Terminal FF2**

If the car is likely to tow a trailer with two fog lamps but has only one fog lamp itself, it would be wise to bring an independent 12 volt supply to connect to terminal FF2 to supplement the supply to the fog lamps on the trailer.

Quality – Service – Innovation

Unit 1, Chadwick Block, Bracewell Ave Poulton-le-Fylde, Lancashire, FY6 8JF, Phone: 01253 881008 (Fax: 01253 886434)

(www.rydertowing.co.uk mail@rydertowing.co.uk)